


DELTA-TE™ III

Nozzle-mix line burner

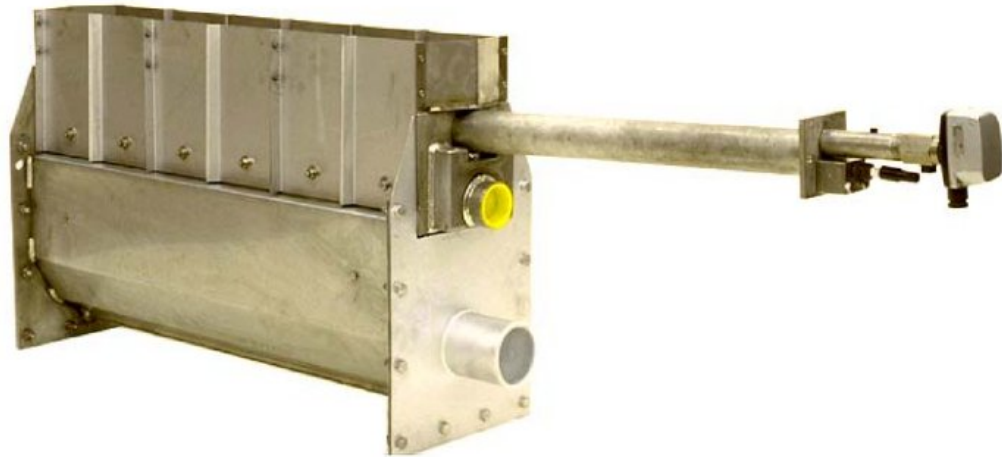

- Combines excellent flexibility with extreme low emissions for direct firing
- Especially designed for firing in low oxygen, high humidity and/or inert process air
- “Plug & Play”-design for easy installation into your duct
- High turndown
- Operates independently from the process-air stream over the burner
- Stainless steel construction in contact with the process-stream
- Max. capacity per linear burner unit of 1 foot [1] : 600 kW HHV
- Fires on natural gas, propane and many other fuel gases
- Accepts preheated air

[1] 1 foot = 305 mm

W W W . M A X O N C O R P . C O M

COMBUSTION SYSTEMS FOR INDUSTRY

Maxon reserves the right to alter specifications and data without prior notice.
© 2005 Copyright Maxon Corporation. All rights reserved.

